


29 - 06 - 2007

1810747 DMKI-FPTER0

designation	TELIS SITUO RTS 434MHZ FOR PTE
reference	1810747
range	RTS New Collection

## FUNCTIONS

One channel wall transmitter compatible with the RTS receivers range.

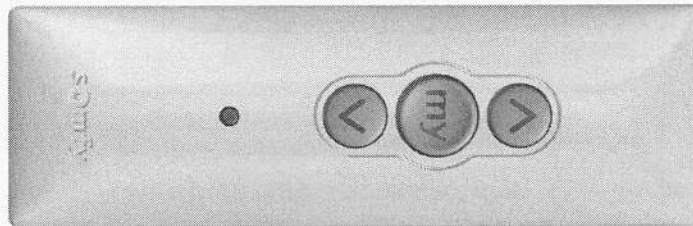

## TECHNICAL SPECIFICATIONS

Box	Material Color Size Protection Index	ABS and SEBS White 120 x 38.5 x 19.5 mm IP 30
Battery	Voltage Type (optimum) Type (reduced performance) Battery life time ( at ambient temperature )	3V CR 2430 Lithium CR 2032 Lithium 2 years with CR 2430 1 year with CR 2032 ( 4 actions / day )
Radio	Frequency ( at ambient temperature ) Conducted power Radiated power Modulation type Protocole	434.000 Mhz +/- 1 kHz 0dBm or 1 mW Max. -10 dBm Max. FSK ( +/- 3 kHz ) RTS U80
Standard		EN 60730 - 2 - 1 IDA TS SRD Issue 1, Rev 1, July 2005 EN 301489 - 3
Temperature range	Storage Working	- 30°C / + 80°C - 20°C / + 60°C with CR 2430 -10°C / + 60°C with CR 2032
Antenna		Integrated
Range ( minimum guaranteed )		20 m with 1 reinforced concrete wall
Weight		approx. 42g

R&amp;D

Name:

Date:

A. Miller 31/07/2007

QUALITY

Name:

Date:

X. COLET

EDITOR

Name:

Date:

F. BROZILLE

29.06.2007